

Art.       EAN 4016671...

### AluTec® Carpenters' roofing hammer

0109800	450 g	730 g		✓	2c	6	034912
0109810	450 g	730 g		✓	2c	6	034929

### AluTec® Framing hammer

0109500-16	450 g / 16 oz.	775 g / 27 oz.		✓	2c	6	035414
0109510-16	450 g / 16 oz.	775 g / 27 oz.		✓	2c	6	035476

### AluTec® Carpenters' roofing hammer in individual packaging

0109801	450 g	730 g		✓	2c	1	034936
0109811	450 g	730 g		✓	2c	1	034943

### PICARD ONLINE

Get the latest news and information on our website, on Facebook and on Instagram.



Website:  
picard-hammer.de



Facebook:  
Picard1857



Instagram:  
picard\_hammer\_official


**PICARD GmbH**  
Rottsiepen 15  
42349 Wuppertal  
Tel. +49 202 24754-0  
Fax +49 202 24754-50  
info@picard-hammer.de

**PICARD-HAMMER.DE**

PicProAluTEn

www.illigenwolf.de

**PICARD**

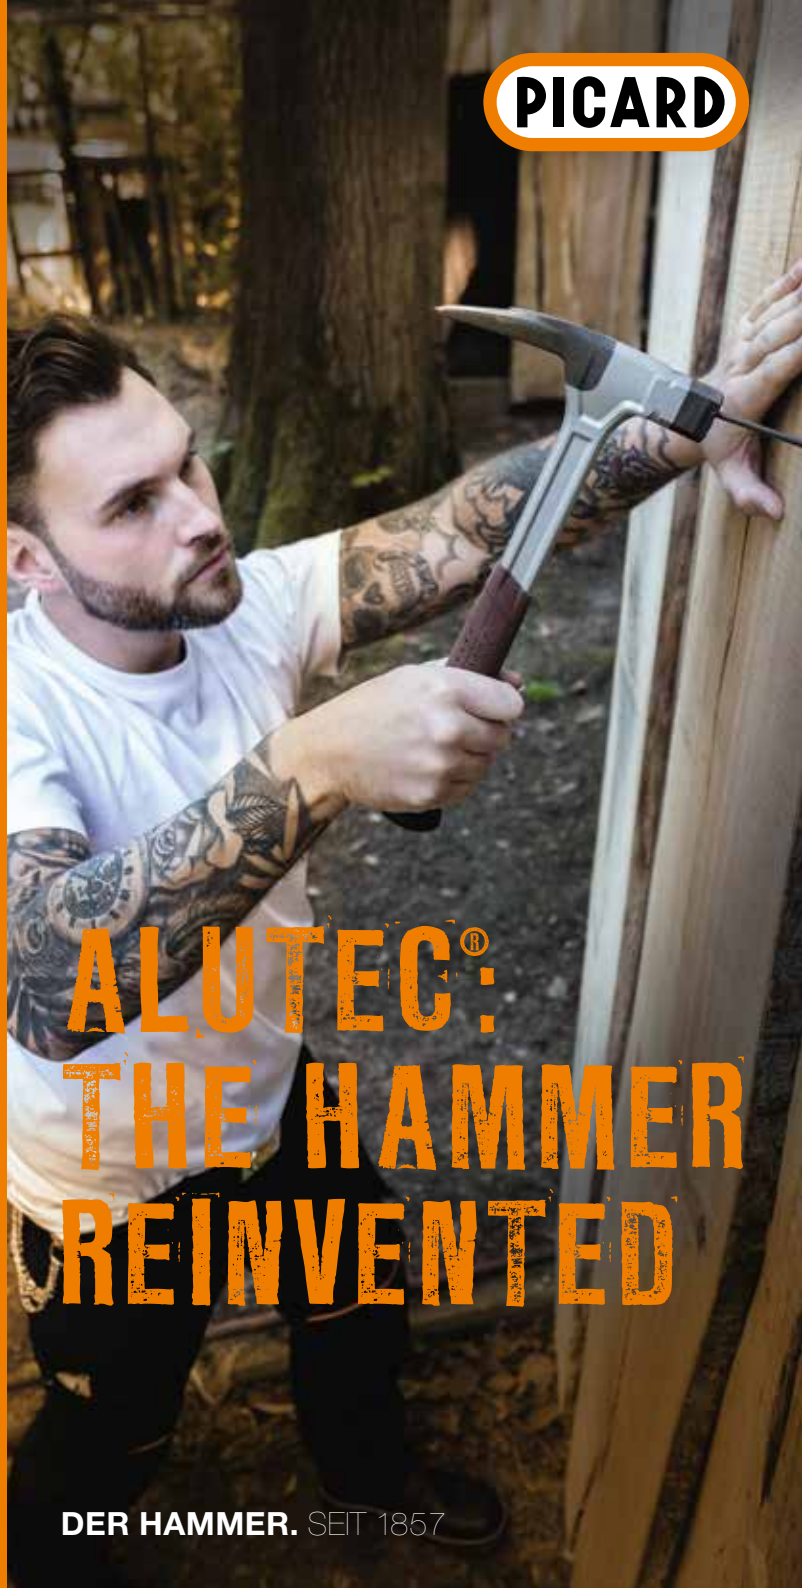

**ALU TEC®  
THE HAMMER  
REINVENTED**

**DER HAMMER. SEIT 1857**

**THE HEAVIER, THE BETTER?  
FORGET EVERYTHING YOU KNEW  
ABOUT HAMMERS.**

**THE ALUTEC® HAS ITS HARD  
COMPONENTS WHERE THEY  
HAVE TO BE. AND WHERE  
WEIGHT IS NOT NEEDED, WE  
HAVE DONE THE MOST LOGICAL  
THING: WE HAVE REDUCED IT.**

**THE RESULT IS CONVINCING AT  
FIRST STROKE: LESS WEIGHT,  
MORE IMPACT POWER.**



With a weight of 730 g, the AluTec® scores points on the tool belt compared to a solid steel hammer



## LESS WEIGHT, MAXIMUM IMPACT

Based on the experience of more than 160 years, the AluTec® was designed as a further development of the proven classic – the Carpenters' Roofing Hammer 298. The combination of aluminium and robust C45 steel show what a modern monobloc hammer is capable of: optimum impact force with reduced weight. The inseparable connection of the steel and aluminium parts makes the AluTec® a very special tool. While the weight of only 730 g scores points when the hammer is worn on a tool belt, the robustness, which is in no way inferior to an all-steel hammer, in combination with the outstanding ergonomics is convincing. The AluTec® is nothing less than the reinvention of the hammer.

The form-fitting and irremovable joint of the components permits light aluminium to be combined with hard steel.



reddot winner 2023  
innovative product

EISEN 2022





The long handle of the Framing hammer 1095 ensures high reach and leverage. The hammer is also available with a roughened face.

#### 01\_Head

Aluminium meets steel: light, but extremely break-resistant where it makes sense. Hard and robust where it gets down to business. The inseparable connection of the components ensures maximum safety. Carefully selected aluminium and steel qualities give AluTec® a long life span and high stability. The nail holder is equipped with an extremely strong magnet.

#### 02\_Claw and point

The claw and the slim, extended tip are precisely machined and inductively hardened. This ensures that even small nails are securely gripped.

#### 03\_Face

The face is carefully hardened and specially tempered; the roughened version has particularly deep checks. Also available with a plain face.

#### 04\_Shaft

The profile of the shaft is as weight-saving as it is stable.

#### 05\_Handle

The handle of the AluTec® quotes the traditional handle used in the handcraft – the one of the PICARD Carpenters' Roofing Hammer 298. For good reason: Shaft and handle are permanently bonded with a specially developed two-component industrial adhesive. A special design ensures that the end of the handle does not work its way through the grip. The vibration-damping material and ergonomic shape ensure low-fatigue work.